


**B32**

Length (m):


98 109 120

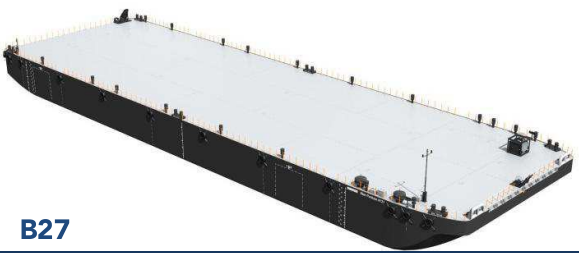

**B27**

Length (m):


91

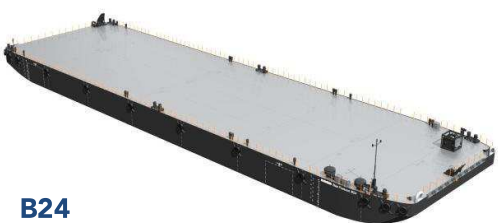

**B24**

Length (m):

63 75 86

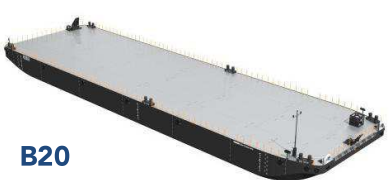

**B20**

Length (m):

49 60 71



**B16**

Length (m):

41 52 63



**B13**

Length (m):

41 52 63



**B11**

Length (m):

30 41 52

Deadweight (ton)

500 750 1000 1500 2000 2500 3000 3500 4000 5000 6000 7000 8000 9000 10.000 12.500 15.000 20.000

# DAMEN STAN PONTOON® RANGE

## DAMEN STAN PONTOON RANGE

Stan Pontoons are available in multiple beams, which are available in variable lengths. Modular building makes very short delivery times possible. Because of prepared options Damen pontoons are fit for any purpose.

### Typical applications:

- General deck cargo
- RoRo pontoon
- Semi-submersible pontoon
- Spud pontoon
- Crane pontoon
- Offshore support pontoon
- Rock dumping pontoon

### Typical areas of operation:

- Deep Sea
- Coastal waters
- Harbours
- Inland waters

### Classification:

Lloyd's Register ✱ 100 AT Pontoon

### STRONG POINTS

- Short delivery times
- High quality
- Proven, safe and reliable standard designs
- All deck thickness based on required t/m<sup>2</sup> + additional 2 mm
- Fully prepared for the installation of all plug and play options (i.e. construction work is done, double plates are mounted)

### STANDARD EXECUTION:

- Towing brackets
- Bollards
- Draught marks
- Emergency towing pin
- Boarding steps
- Cathodic protection
- Ramp recesses
- Lifting eyes (except B32)

### OPTIONAL EQUIPMENT (PLUG AND PLAY)

#### All types

- Navigation lighting
- Tyre fender system
- Towing bridle
- Recovery winch
- Anchor- / mooring winch
- Emergency anchor
- Emergency towing wire
- Anti fouling paint system
- Wooden deck
- Removable railing
- Ramp panels
- Cargo bin

#### Type B24, B27, B32 only

- Ballast pumps
- Removable flush mounted de-aeration heads
- Pump room lighting
- Generator
- Breakwater

#### Type B11 - B13 only

- Spuds
- Spud winches

## DAMEN STAN PONTOON TYPE B32

LENGTH	97,50 / 108,75 / 120,00	m
BEAM	32,20	m
DRAUGHT	6,20 / 6,20 / 6,20	m
DEPTH AT SIDES	8,10	m
DEADWEIGHT	16.000 / 18.000 / 20.000	ton
DECK LOAD	20	ton/m <sup>2</sup>
DECK THICKNESS	20	mm

## DAMEN STAN PONTOON TYPE B27 'NORTH SEA STANDARD'

LENGTH	91,50	m
BEAM O.A.	27,40	m
DRAUGHT	4,90	m
DEPTH AT SIDES	6,10	m
DEADWEIGHT	9.800	ton
DECK LOAD	20	ton/m <sup>2</sup>
DECK THICKNESS	20	mm

## DAMEN STAN PONTOON TYPE B24

LENGTH	63,00 / 74,24 / 85,50	m
BEAM	23,50	m
DRAUGHT	3,68 / 3,60 / 3,40	m
DEPTH AT SIDES	4,50	m
DEADWEIGHT	4.100 / 4.800 / 5.200	ton
DECK LOAD	20	ton/m <sup>2</sup>
DECK THICKNESS	16	mm

## DAMEN STAN PONTOON TYPE B20

LENGTH	48,75 / 60,00 / 71,25	m
BEAM	20,00	m
DRAUGHT	3,20 / 3,20 / 3,10	m
DEPTH AT SIDES	4,00	m
DEADWEIGHT	2.200 / 2.800 / 3.250	ton
DECK LOAD	20	ton/m <sup>2</sup>
DECK THICKNESS	16	mm

## DAMEN STAN PONTOON TYPE B16

LENGTH	40,25 / 51,75 / 63,00	m
BEAM	16,50	m
DRAUGHT	2,84 / 2,83 / 2,75	m
DEPTH AT SIDES	3,50	m
DEADWEIGHT	1.400 / 1.840 / 2.190	ton
DECK LOAD	15	ton/m <sup>2</sup>
DECK THICKNESS	16	mm

## DAMEN STAN PONTOON TYPE B13

LENGTH	41,40 / 52,20 / 63,00	m
BEAM	13,00	m
DRAUGHT	3,00 / 3,00 / 3,00	m
DEPTH AT SIDES	3,00	m
DEADWEIGHT	965 / 1.240 / 1.425	ton
DECK LOAD	10	ton/m <sup>2</sup>
DECK THICKNESS	12	mm

## DAMEN STAN PONTOON TYPE B11

LENGTH	30,00 / 40,80 / 51,60	m
BEAM	11,40	m
DRAUGHT	1,98 / 1,95 / 1,93	m
DEPTH AT SIDES	2,50	m
DEADWEIGHT	475 / 665 / 850	ton
DECK LOAD	10	ton/m <sup>2</sup>
DECK THICKNESS	11	mm

\* Mentioned deadweight is calculated and excluding optional equipment

# DAMEN STAN PONTOON® RANGE

# DAMEN

DAMEN SHIPYARDS GORINCHEM

Member of the DAMEN SHIPYARDS GROUP



Industrieterrein Avelingen West 20  
4202 MS Gorinchem

P.O. Box 1  
4200 AA Gorinchem  
The Netherlands

phone +31 (0)183 63 99 11  
fax +31 (0)183 63 21 89

pontoons-barges@damen.nl  
info@damen.nl  
www.damen.com